


# AS 20

INDUSTRIAL SCRAP VACUUMS FOR CUTTINGS AND PROCESSING WASTE



Filter category:

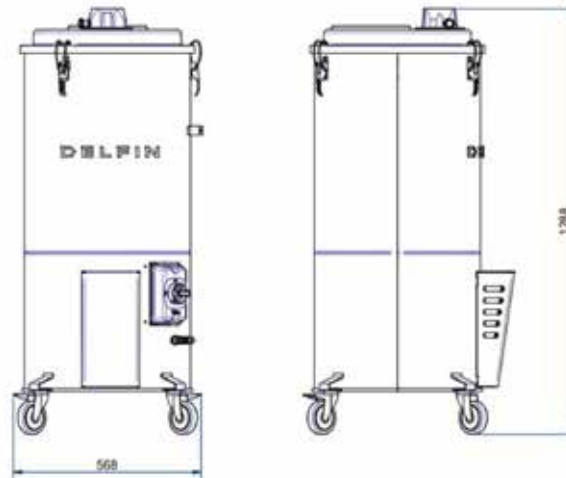

## FEATURES

Extraction of production waste directly from production/ packaging machinery and the textile industry

Complete painted steel construction

Nylon Bag

Motor requiring no routine maintenance, suitable for continuous 24/7 operation

Compact and mobile

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

**DELFIN**  
FOR A DUST-FREE WORLD  
[www.delfinvacuums.com](http://www.delfinvacuums.com)  
[delfin@delfinvacuums.it](mailto:delfin@delfinvacuums.it)

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED  
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

## TECHNICAL DATA

|  |                   | AS20-001            |
|--|-------------------|---------------------|
| Voltage                                      | V                 | 400                 |
| Power  | kW                | 2.5                 |
| Frequency                                    | Hz                | 50                  |
| Current draw                                 | A                 | 5.0                 |
| Suction inlet diameter                       | mm                | 80                  |
| Tank capacity                                | L.                | 130                 |
| Noise level                                  | dB(A)             | 68                  |
| Dimensions                                   | cm                | 62x55x132h          |
| Weight                                       | kg                | 70                  |
| Electrical protection                        | IP                | 65                  |
| Maximum vacuum                               | mmH2O             | 2100                |
| Continuous waterlift                         | mmH2O             | 2200                |
| Maximum air flow                             | m <sup>3</sup> /h | 270                 |
| Motor Type                                   |                   | Three-phase Turbine |
| Primary filter                               |                   | Bag                 |
| Primary filter surface area                  | cm <sup>2</sup>   | 500                 |
| Primary filter diameter                      | mm                | 660                 |
| Primary filter media                         |                   | Nylon               |
| Filter class (IEC 60335-2-69) primary filter |                   | L                   |

## OPTIONAL

| Code | Description                        |
|------|------------------------------------|
| X    | AISI 304 stainless steel container |
| MT   | Earth Grounding                    |
| SGB  | Grated basket                      |



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED  
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

| MACHINE CODE | DESCRIPTION |
|--------------|-------------|
| AS20-001     | AS20        |

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

**DELFIN**  
FOR A DUST-FREE WORLD

www.delfinvacuums.com  
delfin@delfinvacuums.it