


# AS30-001

INDUSTRIAL SCRAP VACUUMS FOR CUTTINGS AND PROCESSING WASTE



Filter category:

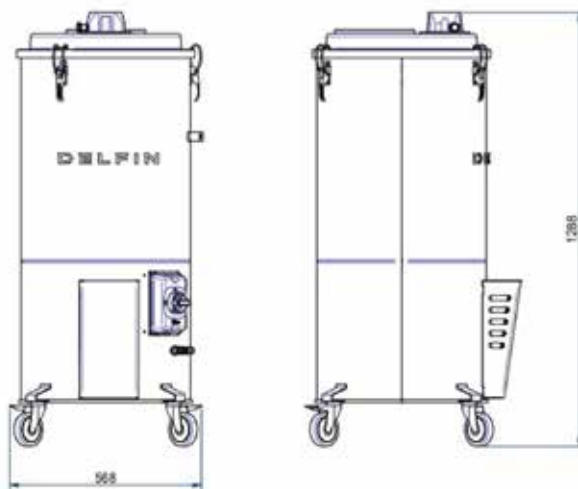

## FEATURES

Extraction of production waste directly from production/packaging machinery and the textile industry

Complete painted steel construction

Nylon Bag

Motor requiring no routine maintenance, suitable for continuous 24/7 operation

Compact and mobile

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

**DELFIN**  
FOR A DUST-FREE WORLD  
[www.delfinvacuums.com](http://www.delfinvacuums.com)  
[delfin@delfinvacuums.it](mailto:delfin@delfinvacuums.it)

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED  
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

## TECHNICAL DATA

		AS30-001
Voltage	V	400
Power	kW	2.5
Frequency	Hz	50
Current draw	A	5.0
Suction inlet diameter	mm	80
Tank capacity	L.	130
Noise level	dB(A)	69
Dimensions	cm	52x69x145h
Weight	kg	75
Electrical protection	IP	65
Maximum vacuum	mmH2O	2200
Continuous waterlift	mmH2O	2000
Maximum air flow	m <sup>3</sup> /h	318
Motor Type		Three-phase Turbine
Primary filter		Bag
Primary filter surface area	cm <sup>2</sup>	500
Primary filter diameter	mm	660
Primary filter media		Nylon
Filter class (IEC 60335-2-69) primary filter		L

## OPTIONAL

Code	Description
X	AISI 304 stainless steel container
MT	Earth Grounding
SGB	Grated basket



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED  
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
AS30-001	AS30

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

**DELFIN**  
FOR A DUST-FREE WORLD

www.delfinvacuums.com  
delfin@delfinvacuums.it