



C600 M

THREE-PHASE VACUUM CLEANERS FOR CONTINUOUS USE IN THE MANAGEMENT OF LARGE VOLUMES OF MATERIAL

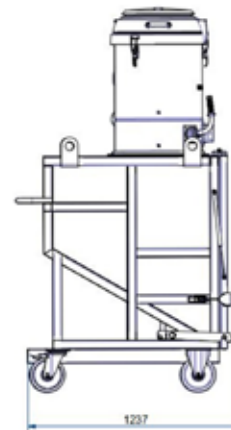

Filter category:

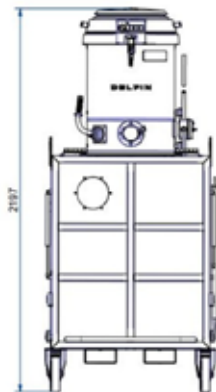

FEATURES

Large quantities of material

Industrial construction with high durability and easy maintenance, with forklift pockets
Complete painted steel construction

Manual filter cleaning system

Compact design and front discharge system

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

 OPTIONAL

		C600M-001
Voltage	V	230
Power	kW	3,45
Frequency	Hz	50
Current draw	A	15
Suction inlet diameter	mm	80
Tank capacity	L.	600
Noise level	dB(A)	76
Dimensions	cm	100x130x224h
Weight	kg	380
Maximum vacuum	mmH2O	2500
Continuous waterlift	mmH2O	2500
Maximum air flow	m ³ /h	540
Motor Type		Single-phase Bypass
Primary filter		Star
Primary filter load	m ³ (m ² /h)	110
Primary filter surface area	cm ²	49000
Primary filter media		Polyester
Filter class (IEC 60335-2-69) primary filter		ANT M
Filter cleaning system		Manual
Discharge system		Front discharge



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
C600M-001	VACUUM SEPARATOR/600L VACUUM CONTAINER WITH 3 MOTORS

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it