


DBFV 10

FIXED EXHAUST UNIT FOR MACHINERY: COMPACT AND MODULAR SOLUTION FOR INDUSTRIAL ENVIRONMENTS



Filter category:

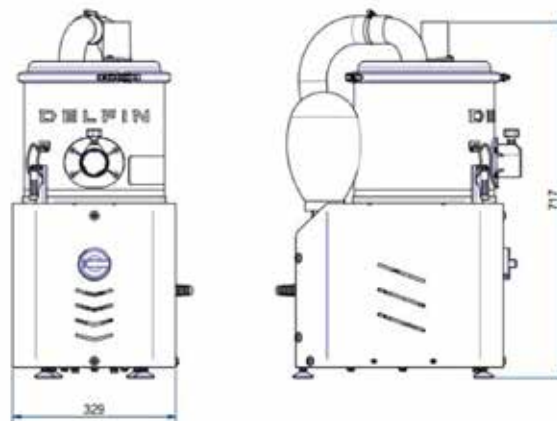

FEATURES

Fixed suction unit on board the machine

Compact and horizontal construction

complete steel construction

Bag Filter

Modular components for installation on machinery and production lines

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

		DBFV10-001
Voltage	V	400
Power	kW	1.35
Frequency	Hz	50
Current draw	A	2.1
Suction inlet diameter	mm	50
Tank capacity	L.	15
Noise level	dB(A)	69
Dimensions	cm	52x33x74h
Weight	kg	35
Electrical protection	IP	65
Maximum vacuum	mmH2O	2000
Continuous waterlift	mmH2O	1800
Maximum air flow	m ³ /h	150
Motor Type		Three-phase Turbine
Primary filter		Bag
Primary filter surface area	cm ²	2000
Primary filter diameter	mm	280
Primary filter media		Polyester
Filter class (IEC 60335-2-69) primary filter		M PTFE
Pressure relief valve		Included

OPTIONAL

Code	Description
H	Additional H14 absolute filter
X	AISI 304 stainless steel container
XXX	Chamber chassis, container and trolley in AISI 304 stainless steel
MT	Earth Grounding
SP	Single-phase suction unit



MACHINE CODE	DESCRIPTION
DBFV10-001	DBFV 10

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it