


DBFV 30

FIXED EXHAUST UNIT FOR MACHINERY: COMPACT AND MODULAR SOLUTION FOR INDUSTRIAL ENVIRONMENTS



Filter category:

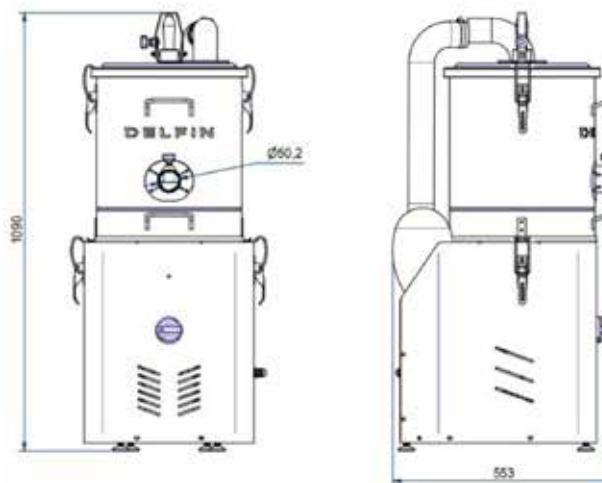

FEATURES

Fixed suction unit on board the machine

Compact and horizontal construction

complete steel construction

Star filter with manual cleaning system

Modular components for installation on machinery and production lines

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

D E L F I N
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

		DBFV30MAN-001
Voltage	V	400
Power	kW	2.5
Frequency	Hz	50
Current draw	A	5.0
Suction inlet diameter	mm	50
Tank capacity	L.	25
Noise level	dB(A)	70
Dimensions	cm	54x55x105h
Weight	kg	60
Electrical protection	IP	65
Maximum vacuum	mmH2O	2600
Continuous waterlift	mmH2O	2000
Maximum air flow	m ³ /h	318
Motor Type		Three-phase Turbine
Primary filter		Star
Primary filter surface area	cm ²	8000
Primary filter diameter	mm	360
Primary filter media		Polyester
Filter class (IEC 60335-2-69) primary filter		ANT M
Filter cleaning system		Manual
Pressure relief valve		Included

OPTIONAL

Code	Description
H	Additional H14 absolute filter
X	AISI 304 stainless steel container
XXX	Chamber chassis, container and trolley in AISI 304 stainless steel
MT	Earth Grounding
CHASSIS	Cart with wheels and a push handle



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
DBFV30MAN-001	DBFV30 MANUAL CLEANING

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it