
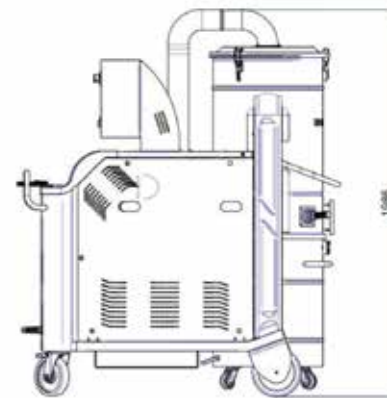


DG VL 110 SE MAN

INDUSTRIAL VACUUM CLEANERS FOR HEAVY AND CONTINUOUS APPLICATIONS

Filter category:

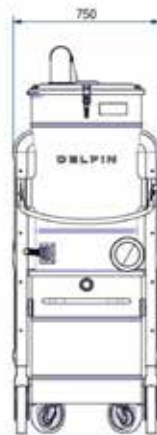

FEATURES

Dust and solids

Industrial construction with high durability and easy maintenance, with forklift pockets

Complete painted steel construction

Manual filter shaker cleaning system

Continuous service, no maintenance required

D E L F I N
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

TECHNICAL DATA

		DGVLI10SEMAN-001
Voltage	V	400
Power	kW	12.6
Frequency	Hz	50
Current draw	A	23.3
Suction inlet diameter	mm	120
Tank capacity	L.	160
Noise level	dB(A)	76
Dimensions	cm	170x75x200h
Weight	kg	290
Electrical protection	IP	65
Maximum vacuum		5100
Continuous waterlift		4600
Maximum air flow		520
Motor Type		Three-phase Turbine
Primary filter		Star
Primary filter load	m ³ (m ² /h)	74
Primary filter surface area	cm ²	70000
Primary filter diameter	mm	560
Primary filter media		Polyester
Filter class (IEC 60335-2-69) primary filter		ANT M
Filter cleaning system		Manual
Absolute HEPA Filter		Optional
Filter area of the absolute filter	cm ²	103500
Absolute filter class (EN 1822-5)		H14 with 99.995% efficiency according to the MPPS method
Pressure relief valve		Included

MACHINE CODE	DESCRIPTION
DGVLI10SEMAN-001	DG VL 110 SE MANUAL 160L DT DS

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

OPTIONAL

Code	Description
H	Additional H14 absolute filter
M PTFE	Class M filter with PTFE coating
TIMED	Automatic, timed filter shaking
X	AISI 304 stainless steel container
XX	Steel container and filter chamber in AISI 304 stainless steel
MT	Earth Grounding
LOC/REM (ATEX+25%)	Remote control (with 24V electric panel if not present) +25% ATEX
HARDOX	Reinforced plate for filter chamber
FLOOR-MOUNTED	Fixed floor frame



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it