


MTL 501 WD

INDUSTRIAL WET VACUUM CLEANER

Filter category:

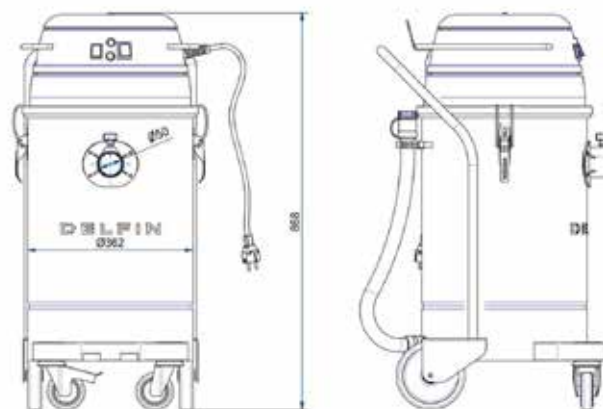

FEATURES

Wet and dry

Compact and mobile

Complete painted steel construction

Standard double filtration kit wet (PPL) & dry

Manual liquid discharge, floating device

All data mentioned in this document is subject to change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

		MTL501WD-001
Voltage	V	230
Power	kW	1.15
Frequency	Hz	50
Current draw	A	5
Other Available Voltage	V	115
Suction inlet diameter	mm	50
Tank capacity	L.	50
Noise level	dB(A)	74
Dimensions	cm	52x40x90h
Weight	kg	28
Maximum vacuum		2500
Continuous waterlift		2500
Maximum air flow		180
Motor Type		Single-phase Bypass
Primary solid filter (dry)		Star
Filter class (IEC 60335-2-69) for dry particulate filter		L
Filter surface area - solid filter (dry)	cm2	8000
Diameter of the solid filter (dry)	mm	360
Filter media for primary solid filter (dry)		Polyester
Primary filter (wet)		Bag
Filter area - liquid filter (wet)	cm2	4000
Diameter of liquid filter (wet)	mm	360
Filter media for liquid filter (wet)		Polypropylene
Filtration	µm	100
Discharge system		Discharge tube

OPTIONAL

Code	Description
X	AISI 304 stainless steel container



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
MTL501WD-001	MTL501WD - WET & DRY KIT 40

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it