


# MTL 802 WXP

INDUSTRIAL LIQUID SUCTION UNIT WITH SIMULTANEOUS SUCTION AND DISCHARGE CAPABILITY



Filter category:

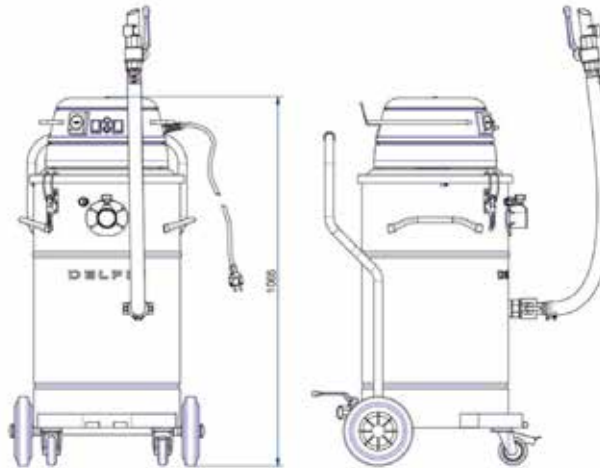

## FEATURES

Wet and dry

Compact and mobile

Simultaneous suction and discharge for pump version

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

**DELFIN**  
FOR A DUST-FREE WORLD  
[www.delfinvacuums.com](http://www.delfinvacuums.com)  
[delfin@delfinvacuums.it](mailto:delfin@delfinvacuums.it)

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED  
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

## TECHNICAL DATA

 OPTIONAL

		MTL802WDP-001
Voltage	V	230
Power	kW	2.3
Frequency	Hz	50
Current draw	A	10
Other Available Voltage	V	115
Suction inlet diameter	mm	50
Tank capacity	L.	80
Noise level	dB(A)	76
Dimensions	cm	56x67x107h
Weight	kg	50
Maximum vacuum		2500
Continuous waterlift		2500
Maximum air flow		360
Motor Type		Single-phase Bypass
Primary filter		Bag
Primary filter surface area	cm2	5000
Primary filter diameter	mm	420
Primary filter media		Nylon + Polyester
Filter class (IEC 60335-2-69) primary filter		L
Primary filter (wet)		Bag
Filter area - liquid filter (wet)	cm2	5
Diameter of liquid filter (wet)	mm	420
Filter media for liquid filter (wet)		Polypropylene
Filtration	µm	300



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED  
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
MTL802WDP-001	MTL802WXP KITØ40 with immersion pump, Stainless Steel Tank, and continuous discharge

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

**DELFIN**  
FOR A DUST-FREE WORLD

www.delfinvacuums.com  
delfin@delfinvacuums.it