

TC 220 MPI

INDUSTRIAL VACUUM CLEANER FOR MAINTENANCE OF MACHINE TOOLS AND CNC

Filter category:




FEATURES

Separation and recovery of oil and chips for machine tool maintenance
Easy to transport

Complete painted steel construction

Superweb 3D Kit, sieve grid basket for chip separation and polypropylene filter for liquids

Reversible flow liquid drain or submersible pump (with continuous suction and discharge)

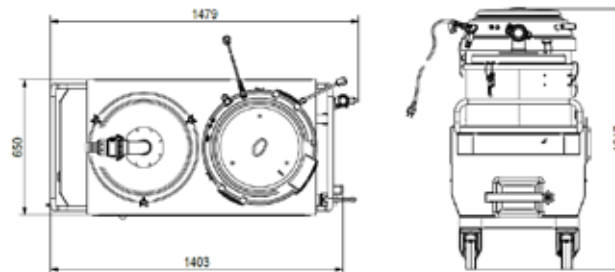

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

TECHNICAL DATA

		TC220MP-001
Voltage	V	230
Power	kW	3.45
Frequency	Hz	50
Current draw	A	15
Suction inlet diameter	mm	50
Noise level	dB(A)	76
Dimensions	cm	150x72x125h
Weight	kg	165
Liquids capacity	L.	220
Solids capacity	L	40
Discharge capacity		160
Maximum vacuum	mmH2O	2500
Continuous waterlift	mmH2O	2500
Maximum air flow	m ³ /h	540
Motor Type		Single-phase Bypass
Primary filter		3D Superweb
Primary filter diameter	mm	500
Filter class (IEC 60335-2-69) primary filter		Polypropylene
Filtration	µm	20
Discharge system		Internal Pump
Head	mmH ₂ O	6.89
Floating device		Electrical

OPTIONAL

Code	Description
PPL300	PPL oil filter kit up to 300 microns (in suction)
OWR	Oil & water repellent cartridge



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
TC220MP-001	TECNOIL 220 SINGLE-PHASE SUBMERSIBLE PUMP

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it