

DGVL 125 MANUAL 1/3D

ATEX CERTIFIED INDUSTRIAL VACUUM CLEANER FOR DUST AND SOLIDS



 **24 hour continuous service**
servizio continuativo 24h

Filter category:



DRY TYPE DUST COLLECTOR
(EN 17348 DT)

FEATURES

Dust and solids



Industrial construction with high durability and easy maintenance

Painted steel construction with ABS accessory holder

Antistatic polyester class M with integrated manual filter cleaning

Ex Certified Side Channel Blower

Compliance with EN IEC 62784:2018 for Zone 22

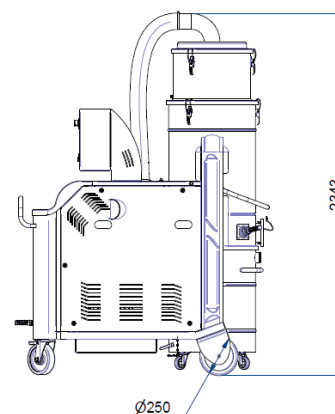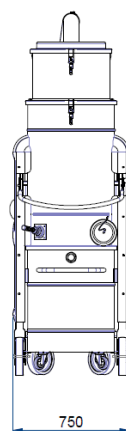

All data mentioned in this document may change without notice.

D E L F I N
FOR A DUST-FREE WORLD

TECHNICAL DATA

 OPTIONAL

		Z22DGVLI25MAN-001
Use Zone		ATEX Zone: 20 Internal/22 External
Marking		II 1/3D Ex h IIIC T135°C (Int) /T195°C (ext) Da/ Dc
EX Category		1/3D (20 int/22 ext)
Voltage	V - Hz	400 - 50 3~
Power, Current draw	kW - A	12,6 - 23,3
Electrical protection	IP	65
Pressure relief valve		Included
Max waterlift	mmH ₂ O	3600 / 2900
Max airflow	m ³ /h	1050
Suction inlet	mm	120
Capacity	lt.	160
Noise level	dB(A)	78
Dimensions	cm	170x75x240h
Weight	kg	430
Primary filter		Star
Surface - diameter	cm ² -mm	70.000 - 560
Media - Media, Classe (IEC 60335-2-69) ²		Polyester - ANT M
Air load on filter	m ³ (m ² /h)	150
Cleaning system		Manual
Class H-HEPA filter		Standard
Filter surface	cm ²	90.000
Filter grade		H14 with 99.995% efficiency according to the MPPS method

MACHINE CODE	DESCRIPTION
Z22DGVLI25MAN-001	DG VL 125 MANUAL 1/3D 160L DT DS H X

DELFIN
FOR A DUST-FREE WORLD