


452 AIREX 7V 1/2D

INDUSTRIAL VACUUM CLEANER WITH COMPRESSED AIR ATEX CERTIFIED FOR ZONE 20 INTERNAL AND ZONE 22 EXTERNAL



Filter category:

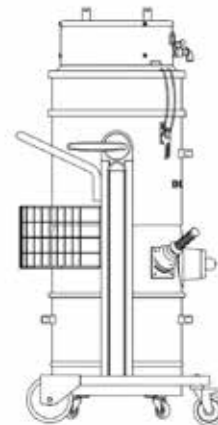

FEATURES

Dust and solids

Compact, sturdy and mobile

painted steel container

Antistatic polyester filter class M and H14 with Dustop filter cleaning system

Exceptional air consumption-to-performance ratio, maintenance-free

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

		452AIREX14VZ22-001
Use Zone		ATEX Zone: 20 Internal/22 External
Marking		II 1/3D Ex h IIIC T80°C Da/Dc
Ex Category		1/3D (20 int/22 ext)
Suction inlet diameter	mm	80
Tank capacity	L.	45
Noise level	dB(A)	68
Dimensions	cm	58x70x119h
Weight	kg	49
Voltage	nL/min (°³/h)	1458 (87)
Air Supply Pressure	bar	6
External air supply hose diameter	mm	12
Maximum vacuum	mmH2O	3700
Continuous waterlift	mmH2O	3700
Maximum air flow	m³/h	300
Motor Type		Compressed Air / Venturi
Primary filter		Star
Primary filter surface area	cm²	20000
Primary filter diameter	mm	420
Primary filter media		Polyester
Filter class (IEC 60335-2-69) primary filter		ANT M
Filter cleaning system		Manual
Absolute HEPA Filter		Standard
Filter area of the absolute filter	cm²	20600
Absolute filter class (EN 1822-5)		H14 with 99.995% efficiency according to the MPPS method

OPTIONAL

Code	Description
M PTFE ANT	Class M filter with PTFE coating, antistatic.
X	AISI 304 stainless steel container



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
452AIREX14VZ22-001	452 AIREX 14V 1/3D - IEC EX AC/DC 45L DT DS H MT ANT

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.