

AF 302 TORCH

WELDING FUME VACUUM CLEANER

Filter category:




FEATURES

Vacuum cleaner for welding fumes at the source on Mig-mag welders

Filtration of fumes and harmful substances and DUSTOP system for filter cleaning

With remote control for automatic switching on and off

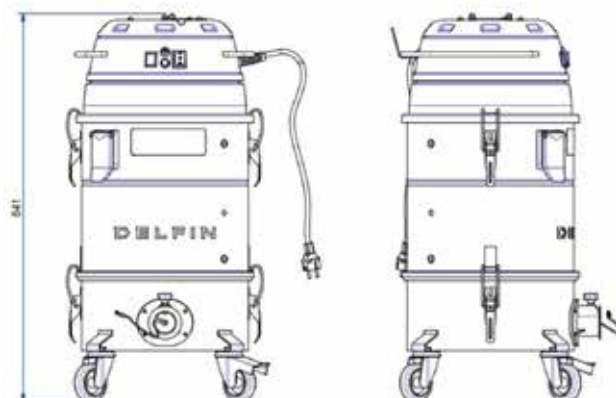

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

D E L F I N
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

		AF302TORCH-001
Voltage	V	230
Power	kW	2.3
Frequency	Hz	50
Current draw	A	10
Suction inlet diameter	mm	50
Tank capacity	L.	13
Noise level	dB(A)	76
Dimensions	cm	45x44x86h
Weight	kg	25
Maximum vacuum	mmH2O	2500
Continuous waterlift	mmH2O	2500
Maximum air flow	m ³ /h	360
Motor Type		Single-phase Bypass
Primary filter		Cartridge
Primary filter surface area	cm ²	7500
Primary filter diameter	mm	245
Primary filter media		Polyester
Filter class (IEC 60335-2-69) primary filter		M
Filter cleaning system		Dustop
Absolute HEPA Filter		Optional
Filter area of the absolute filter	cm ²	20500
Absolute filter class (EN 1822-5)		H14 with 99.995% efficiency according to the MPPS method

OPTIONAL

Code	Description
H	Additional H14 absolute filter
CA	Activated carbon filter
CA + H	Activated carbon filter + Absolute filter
HOOD	Suction hood ø50



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
AF302TORCH-001	302 TORCH

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it