


COMPACT 30 kW HOPPER

COMPACT INDUSTRIAL VACUUM CLEANER HIGH AIRFLOW 30 kW WITH 1000L HOPPER



Filter category:



FEATURES

Compact, high-performance vacuum unit for heavy industry, movable with a forklift.

Equipped with a 3-lobe rotary pump Large-surface-area pocket filter with mechanical cleaning via a pneumatic piston

1000-liter conical hopper with manual butterfly valve D.250 mm

Telescopic legs for forklift lifting (optional) On-board compressor for filter cleaning

All data mentioned in this document is subject to change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it


COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

| | | CP22/780AFH-001 |
|---|------------------------------------|-----------------------|
| Voltage | V | 400 |
| Power | kW | 22 |
| Frequency | Hz | 50 |
| Suction inlet diameter | mm | 127 |
| Tank capacity | L. | 1000 |
| Noise level | dB(A) | 80 |
| Dimensions | cm | 202x172x359/435h |
| Weight | kg | 1360 |
| Electrical protection | IP | 55 |
| Maximum air flow | m ³ /h | 1300 |
| Primary filter | | Pocket filter |
| Primary filter load | m ³ (m ² /h) | 108 |
| Primary filter surface area | cm ² | 120000 |
| Primary filter diameter | mm | 780 |
| Primary filter media | | Polyester |
| Filter class (IEC 60335-2-69) primary filter | | ANT M (Teflon coated) |
| safety filter | | CARTRIDGE |
| Filter surface area of safety filter | cm ² | 40000 |
| Safety filter diameter | mm | 430 |
| Filter media - safety filter | | POLYESTER |
| Filter class - safety filter (IEC 60335-2-69) | | M |

OPTIONAL

| | |
|---------------|---|
| SL.3611.0200 | Female ball connection ø127/107 |
| SL.4171.0200 | Female spherical connection Ø127/80 - Female spherical connection Ø127/80 |
| SL.7565.0200 | Female spherical connection Ø127/127 |
| EP.0698.0000 | Neoprene power cable H07RNF 4G16 (30/37 kW) |
| EP.0667.0000 | Plug 63A 3P+T IP67 |
| EP.0711.0000 | |
| FI.0199.0000 | M PTFE filter with membranes 24T D780 H800 |
| ST.1790.7011Z | TELESCOPIC Chassis - TELESCOPIC Chassis |

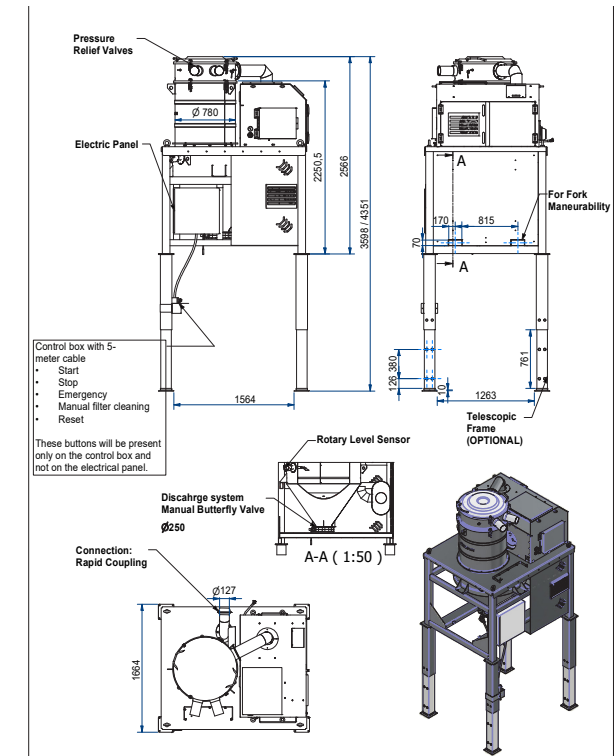

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

| MACHINE CODE | DESCRIPTION |
|-----------------|---------------------------|
| CP30-780AFH-001 | COMPACT 30 AIRFLOW HOPPER |

All data mentioned in this document is subject to change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it