



DM 40 WD

INDUSTRIAL WET VACUUM CLEANER

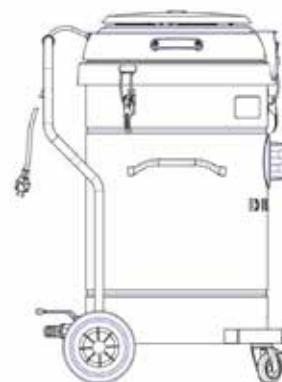

Filter category:

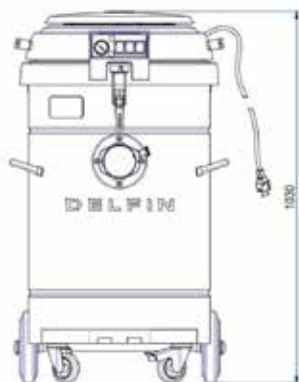

FEATURES

Wet and dry

Compact and mobile

Complete painted steel construction

Standard double filtration kit wet (PPL) & dry

Manual liquid discharge, floating device

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

		DM40WD-001
Voltage	V	230
Power	kW	3,45
Frequency	Hz	50
Current draw	A	15
Other Available Voltage	V	115
Suction inlet diameter	mm	80
Tank capacity	L.	120
Noise level	dB(A)	76
Dimensions	cm	71x63x105h
Weight	kg	50
Maximum vacuum		2500
Continuous waterlift		2500
Maximum air flow		540
Motor Type		Single-phase Bypass
Primary filter		Bag
Primary solid filter (dry)		Bag
Filter class (IEC 60335-2-69) for dry particulate filter		L
Filter surface area - solid filter (dry)	cm2	8000
Diameter of the solid filter (dry)	mm	500
Filter media for primary solid filter (dry)		Polyester
Primary filter (wet)		Bag
Filter area - liquid filter (wet)	cm2	8000
Diameter of liquid filter (wet)	mm	500
Filter media for liquid filter (wet)		Polypropylene
Filtration	µm	100
Discharge system		Discharge valve

OPTIONAL

Code	Description
X	AISI 304 stainless steel container



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
DM40WD-001	DM40 WD - WET & DRY KIT 50

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it