


# TC 400 T43

INDUSTRIAL VACUUM CLEANER FOR EMPTYING TANKS AND RESERVOIRS



Filter category:

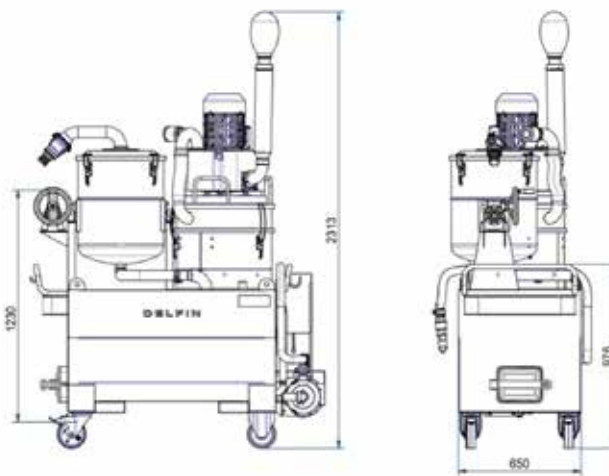

## FEATURES

Separation and recovery of oil and chips for machine tool maintenance

Easy to transport

Complete painted steel construction

Superweb 3D Kit, sieve grid basket for chip separation and polypropylene filter for liquids

Reversible flow liquid drain or submersible pump (with continuous suction and discharge)

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

**DELFIN**  
FOR A DUST-FREE WORLD  
[www.delfinvacuums.com](http://www.delfinvacuums.com)  
[delfin@delfinvacuums.it](mailto:delfin@delfinvacuums.it)

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED  
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

## TECHNICAL DATA

		TC400T43-001
Voltage	V	400
Power	kW	4.3
Frequency	Hz	50
Current draw	A	9.00
Suction inlet diameter	mm	50
Noise level	dB(A)	76
Dimensions	cm	156x70x240h
Weight	kg	250
Electrical protection	IP	65
Liquids capacity	L.	400
Solids capacity	L	50
Discharge capacity		350
Maximum vacuum	mmH2O	5100
Continuous waterlift	mmH2O	4000
Maximum air flow	m <sup>3</sup> /h	320
Motor Type		Three-phase Turbine
Primary filter		3D Superweb
Primary filter diameter	mm	500
Filter class (IEC 60335-2-69) primary filter		Polypropylene
Filtration	µm	20
Discharge system		External pump
Automatic motor shutdown control		Yes

## OPTIONAL

Code	Description
PPL300	PPL oil filter kit up to 300 microns (in suction)
OWR	Oil & water repellent cartridge
PUMP	300 l/min discharge with electric sensor
AUT.PUMP	Automatic discharge when the container is full (pump discharge is required)



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED  
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
TC400T43-001	TC 400 P 4.3 kW

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

**DELFIN**  
FOR A DUST-FREE WORLD

www.delfinvacuums.com  
delfin@delfinvacuums.it