


DG 75 AF

ATEX CERTIFIED INDUSTRIAL VACUUM CLEANER ON WHEELS FOR DUST, SOLIDS AND LIQUIDS



Filter category:

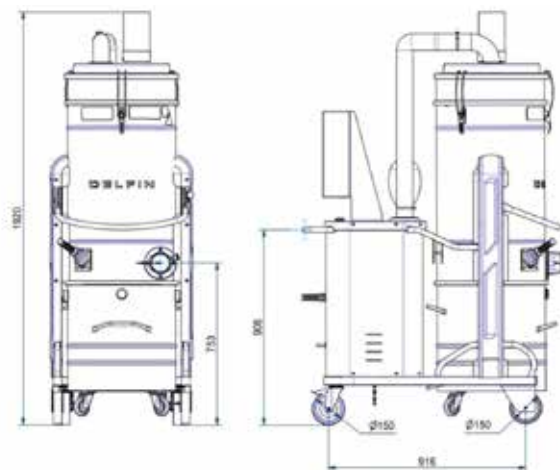

FEATURES

Dust and solids

Industrial construction with high durability and easy maintenance
Painted steel construction with ABS accessory holder

Antistatic polyester class M with integrated manual filter cleaning

Ex tb Certified Side Channel Blower

Compliance with EN IEC 62784:2018 for Zone 22

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

 OPTIONAL

		Z22DG75AF-001
Use Zone		ATEX Zone: 20 Internal/22 External
Marking		II 1/3D Ex h tb IIIC T135°C (Int) /T195°C (ext) Da/Dc
Ex Category		1/3D (20 int/22 ext)
Voltage	V	400
Power	kW	8.6
Frequency	Hz	50
Current draw	A	15.5
Suction inlet diameter	mm	80
Tank capacity	L.	100
Noise level	dB(A)	76
Dimensions	cm	67x120x192h
Weight	kg	170
Electrical protection	IP	65
Maximum vacuum	mmH2O	3200
Continuous waterlift	mmH2O	2900
Maximum air flow	m ³ /h	700
Motor Type		Three-phase Turbine
Primary filter		Star
Primary filter load	m ³ (m ² /h)	143
Primary filter surface area	cm ²	49000
Primary filter diameter	mm	500
Primary filter media		Polyester
Filter class (IEC 60335-2-69) primary filter		ANT M
Filter cleaning system		Manual
Absolute HEPA Filter		Included
Filter area of the absolute filter	cm ²	52000



MACHINE CODE	DESCRIPTION
Z22DG75AF-001	DC75 AF Z22-3D 100L DT DS H

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it